

P400


Semi-automatic insertion machine for stamped terminals and SMD connections

The P400 machine is
adapted to small and
medium volume.

It solves the insertion
needs of reeled connections
on any support and
offer the following
advantages :

flexibility, reliability
and productivity.

It is designed to be
compatible with insertion
tools that are compatible
with or adaptable
to AXIS® type
automatic machines.

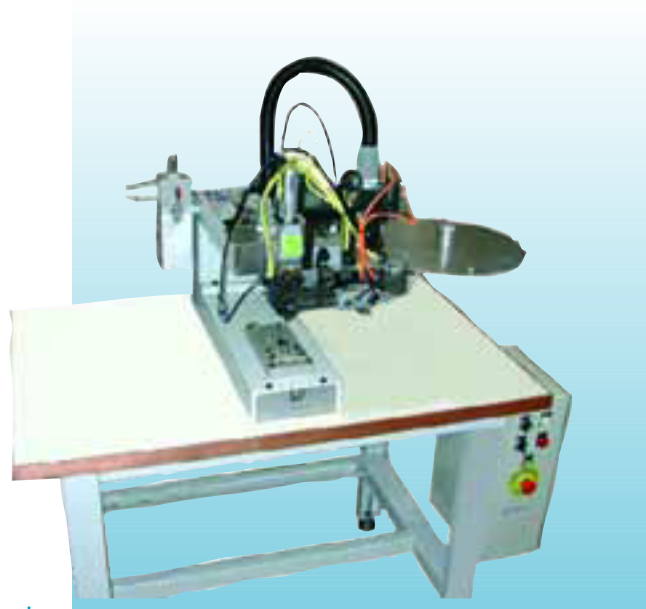

Technical characteristics

- Electropneumatic machines PLC controlled.
- Production rate (machine time) : 7.200 p / hour.
- Production rate (operator time) : 1.500 p / hour.
- Insertion zone : 450 x 450 mm.
- Dimensions
H = 1.600 mm x L = 750 mm x l = 1.000 mm.
- Weight : 120 kg.
- Power supply 220 VAC / 50 Hz single-phase.
- Air supply : 5.5 bars mini.
- Security : conform to EC standards.
- Options : manual, guided XY movement,
automatic waste aspiration.
- Insertion tools :
 - . Standard or specific toolings,
 - . Interchangeable toolings,
 - . Fast removal system of the "easy change" head (option).
 - . Insertion detection (option).
 - . Clinching system to maintain terminal under PCB.
 - . Reel capacity 5000 to 20000 units.

