
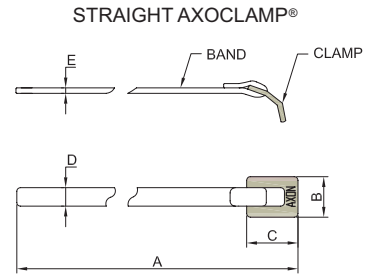


ACCESSORIES

AXOCLAMP® EMI Band termination system

TYPE AX CL xx

Shielding termination for connectors can be carried out on 360° with a patented metal band called AXOCLAMP®. This ensures the continuity of shielding efficiency at the cable/connector junction.



Dimensions are in millimetres (inches)

IDENTIFICATION CODE

AX CL	01
AXOCLAMP®	BAND TYPES 01: STANDARD 02: MICROBAND DOUBLE WRAPPED 03: MICROBAND DOUBLE WRAPPED

The standard version is coiled but straight AXOCLAMP® can be delivered on request (reference example AXCL03D). Minimum quantity: 100 pieces per reference.

DIMENSIONS

Dimensions are in millimetres (inches)

SPECIFICATIONS	AXOCLAMP® STANDARD	AXOCLAMP® MICROBAND	
REFERENCE	AXCL 01	AXCL 02	AXCL 03
DIMENSION A	375 (14.764)	375 (14.764)	200 (7.874)
DIMENSION B	9 (.364)	5.5 (.217)	5.2 (.205)
DIMENSION C	10 (.394)	8 (.315)	5.5 (.217)
DIMENSION D	5.9 (.232)	3.5 (.138)	3 (.118)
DIMENSION E	0.5 (.020)	0.5 (.020)	0.35 (.014)
MINIMUM DIAMETER*	10 (.394)	5 (.197)	5 (.197)
MAXIMUM DIAMETER*	40 (1.575)	15 (.591)	15 (.591)

* Minimum and maximum diameter of the backshell funnel on which the AXOCLAMP® can be mounted.

BANDING TOOLS

	MANUAL HAND TOOL	CLAMPING VALUES	PNEUMATIC CLAMPING TOOL	RECOMMENDED BANDING VALUES*	CALIBRATION DEVICE
AXOCLAMP® AX CL 01	A40199	100-180 LBS	A35199	160	A 50099
AXOCLAMP® AX CL 02	A40199	100-180 LBS	A35199	125	A 50099
AXOCLAMP® AX CL 03	A30199	60-100 LBS	A35599	90	A 50099

* Banding values are given for information only.

